




## Technical Specifications

- Package Includes:**..... Motor, Pump Tube, Hose, Storage Bracket, Barrel Adapter & Hand Nozzle
- Motor Type:**..... Open Drip Proof (IP44)
- Pump Tube Material:**..... Aluminum, SS316, PTFE, Carbon Graphite
- Immersion Length:**..... 39" (1000 mm) or 47" (1200 mm)
- Discharge Hose:** .....PVC, 6 ft (1,8 m), 1" (25 mm) I.D.
- Hand Nozzle Material:** ..... Aluminum, Buna
- Maximum Flow Rate:**..... 22 GPM (83 LPM) *based on water*
- Maximum Viscosity:** ..... 1500 cps (mPas)
- Maximum Temperature:** ..... 175° F (80° C)
- Shipping Weight:**..... 23 lbs. (10,43 kg)

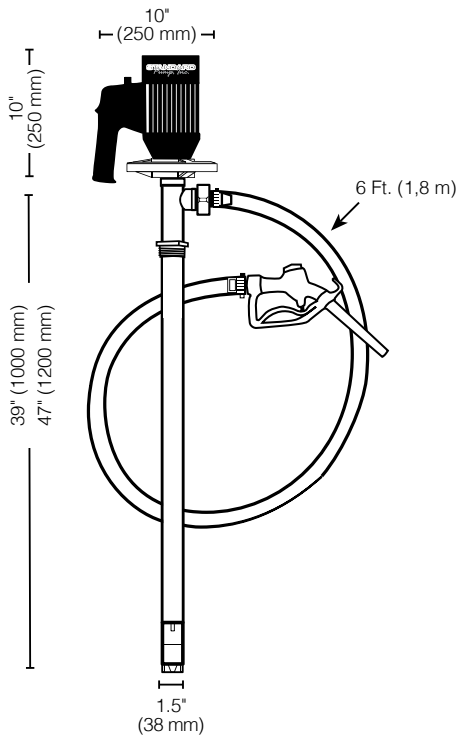

### DRUMS

Package P/N	Motor	Volts	Pump Tube
9760	SP-280P-V	110V	SP-6600-39
9761	SP-280P-2-V	220V	SP-6600-39

### TANKS

Package P/N	Motor	Volts	Pump Tube
9762	SP-280P-V	110V	SP-6600-47
9763	SP-280P-2-V	220V	SP-6600-47



**Warning:** This pump is not suitable for use with Flammable/Combustible liquids.

\*Note: When pumping viscosities over 1,000 cps, pump must be used intermittently to avoid potential premature failure and/or damage.